


Heimgard Entry Lock | Mounting Guide


5 Place new mortise

Insert the mortise in the door leaf and use the screws that you removed from your old mortise.




6 Adjust handle direction

Adjust handle direction using a screwdriver. Reposition for left (L) or right (R) hinge. Align spindle mark with arrow. Re-tighten screws to secure handle.

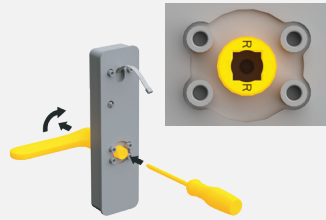


7 Exterior Part

Attach correct spindle by door thickness. Reposition handle as needed. Ensure lock pin engages. Use release tool if spindle is incorrect size and use proper size.



8 Mounting exterior side

Attach rubber gasket to exterior lock. Pass the cable through the upper hole of the door and the spindle and mortise lock, through the lower hole. Use insulation where possible.

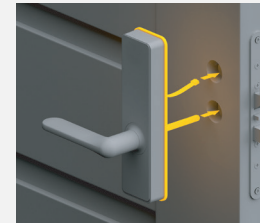


9 Mounting interior side

Attach gasket to mounting bracket. Secure bracket to exterior unit using 4 long screws and manual screwdriver. Choose correct screw length; trim screw if necessary. 5mm engagement required.



10 Connect both sides together

Connect exterior cable to interior unit. Align the connector correctly. Tuck the excess cord towards the hole. Attach the interior unit onto the spindle without pinching gasket.

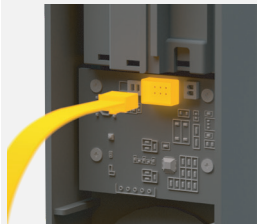

11 Secure the interior side

Remove the battery cover. Secure the inner unit to the bracket using 3 the small black screws.




12 Insert batteries

Insert the supplied batteries (3x AA 1,5V). Make sure to insert them in the right direction according to the polarity (+ and -). Finally, attach the battery cover.



Checklist

Before closing try the inner handle. Test the bolt hook by pushing the pin in the mortise. Insert emergency key below, test the lock with default PIN 1234 #. Close the door and test.



Factory reset

If you ever need to do a factory reset. You can press the reset button in the interior part for 2 seconds. The lock will beep twice and the keypad will flash green when completed.



Quick Installation Guide

Before Installation

- Does the door lock fit your door? The door lock is compatible with door leaf thickness from 40-94 mm.
- Does the strike plate fit? Measure the strike plate with your existing to ensure it has the same dimensions.
- Mortise lock size: Measure the mortise lock with your existing to ensure it has the same dimensions. The mortise lock follows the SS 817383 standard.
- Put the door lock emergency key in your pocket to avoid locking yourself outside while doing the installation.
- It is important to install the door lock with the door open.
- Test the door lock after installation is done before closing the door. Make sure you can unlock the door lock with PIN code and emergency key before closing the door after installation.

For more detailed instructions and other languages:




Instructions



Installation videos

What's in the box

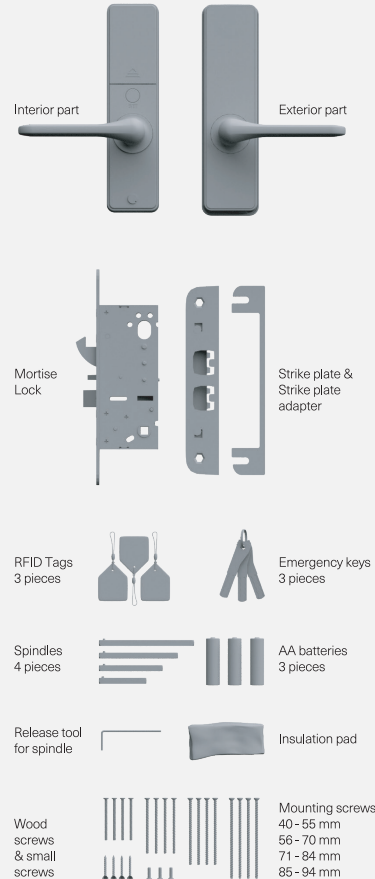

Basic setup

After installation

Default Master Pin is: 1234
Default User for Master PIN: 00

- Set Button: press for 3 seconds
- Success: Keypad flashes green
- Fail: Keypad flashes red

1. Zigbee Onboarding

Start scanning for new devices in your app then:

+ Master PIN * + 1 * + 1 * =

2. Register new Master PIN

+ Master PIN * + 2 * + 1 * +
User (00) * + New Master PIN * +
Repeat Master PIN * + Save [#]

3. Add new user PIN

+ Master PIN * + 2 * + 1 * +
User (01-39) * + Enter new user PIN * +
Save [#] = + beep

4. Add RFID tag

+ Master PIN * + 4 * + 1 * +
User (01-39) * + Scan Tag = + beep


For advanced settings, user management, and more, scan the QR code to access the full manual.

Heimgard Entry Lock | Mounting Guide




1 Strike plate

Remove your old strike plate and replace with the one included in the box.

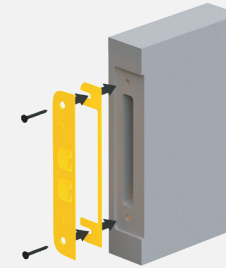

2 Mortise lock

Remove the old door lock and mortise. Stand on the side of the door that opens towards you. Verify if the hinge is on the left or right side.

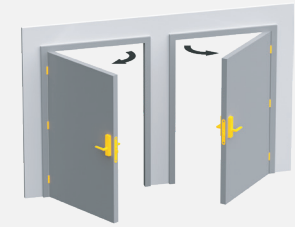

3 Set mortise per hinge direction

Make sure the hook is retracted*.

- Unscrew the front panel (4 screws).
- Turn latch bolt and auxiliary latch to required position.
- re-attach plate.



4 *Retract hook

Follow the instructions below. Use the new door lock to retract the hook.

